


DIAL CALIPERS

Model ETALON 125

Slider with metal dial housing – 1 mm per pointer revolution.



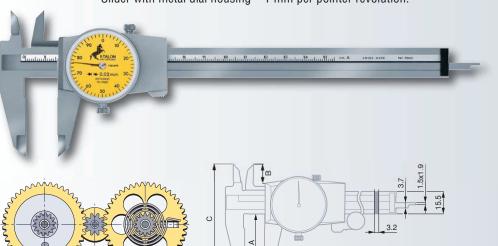





DIN 862 (Style 1AR)



≥100 mm = 20 µm >100 mm = 30 µm



Hardened stainless steel



32 mm diameter rotating dial with lock



Slider with locking screw



Steel gear mechanism, hardened and ground



Patented shockproof design



Suited plastic case




Identification number



Inspection report with a declaration of conformity

Model TESA CCMA-M, 0,01 mm

Slider with metal dial housing – 1 mm per pointer revolution.

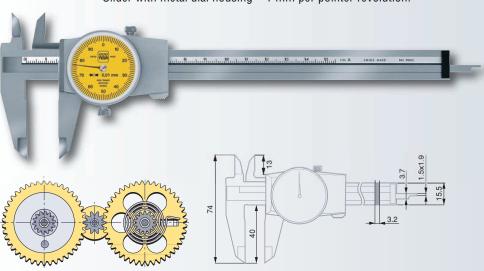







DIN 862 (Style 1AR)



≤ 100 mm = 20 μm > 100 mm = 30 μm



Hardened stainless steel



32 mm dia. rotating dial with lock



Slider with locking screw



Steel gear, hardened and ground



Patented shockproof design



Suited plastic case



Identification number



Inspection report with a declaration of conformity